


DIESEL GENERATOR DATA SHEET

Power By Cummins

Model: A30

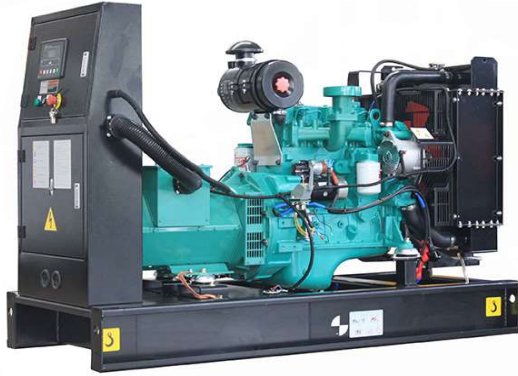

Output Ratings

| Generator set model | Voltage (V) | Hz | Phase | P.F. | Prime Power | | Standby Power | |
|---------------------|-------------|----|-------|------|-------------|----|---------------|----|
| | | | | | KVA | KW | KVA | KW |
| A30 | 230/400 | 50 | 3 | 0.8 | 30 | 24 | 33 | 26 |

•220/380V, 240/415V, 254/440V is available

Dimension & weight

| Generator set model | Type | L*W*H (mm) | Weight (kg) |
|---------------------|--------|----------------|-------------|
| A30 | Open | 1610*730*1285 | 641 |
| | Silent | 2250*1000*1550 | 1070 |

Other datas

| | |
|------------------------------|-------|
| Circuit Breaker capacity (A) | 63 |
| Battery Brand | Varta |
| Base Fuel Tank Capacity (L) | 56 |

Notes:

- Standby power: Continuous running at variable load for duration of an emergency. No overload is permitted on these ratings. In accordance with ISO 3046.
- Prime power: Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period. In accordance with ISO8528, ISO3046.
- Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m(328 ft) A.S.L. 30% relative humidity.

Warranty

- The standard warranty period: One year after ex-work or 1000 operation hours whichever come first shall apply.
- Consumable parts (air filter, fuel filter, lube oil filter), All failures and damages due to the mal-operation, neglect of maintenance and operation not according to the operation manual, are out of the scope of warranty.

Standard Features

| |
|-------------------------------------|
| • Engine include one set filters |
| • Brushless Alternator with AVR |
| • Radiator with engine driven fan |
| • Auto control system with LCD show |
| • 3P circuit breaker |
| • Battery charger and Start battery |
| • Industrial silencer |
| • Anti-vibration pads |
| • 8hrs bottom fuel tank ≤ 650KVA |
| • Standard tools kits |
| • User manual & Wiring diagrams |
| • Standard tools kits |

Options

| |
|---------------------------------|
| • Silent canopy (powder coated) |
| • ATS |
| • Remote Control panel |
| • Synchronization system |
| • Mobile trailer |
| • Engine heater (water/oil) |
| • Fuel and water separator |
| • Alternator space heater |
| • PMG |
| • ABB or 4P circuit breaker |
| • External fuel tank |
| • Double wall base fuel tank |
| • Residential exhaust silencer |



Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice.

Engine

GENERAL ENGINE DATA

| | | |
|-------------------------|---------------------------------|-----|
| Engine manufacturer | Dongfeng Cummins Engine Co. Ltd | |
| Engine brand | Cummins | |
| Engine model | 4B3.9-G12 | |
| Engine speed (rpm) | 1500 | |
| Engine output(kWm) | | |
| | Standby Power | 30 |
| | Prime Power | 27 |
| | Continuous Power | TBD |
| No. of Cylinder | 4 | |
| Aspiration | Naturally Aspirated | |
| Bore * Stroke (mm) | 102 * 120 | |
| Displacement (litre) | 3.9 | |
| Compression Ratio | 18.0:1 | |
| Engine Idle Speed (rpm) | 900-1100 | |

FUEL SYSTEM

| | | |
|-------------------------------|---------------------------|-----|
| Type Injection System | BYC A/Electronic Governor | |
| Fuel Consumption (litre/hour) | | |
| | 100% prime power | 7.4 |
| | 75% prime power | 6.1 |
| | 50% prime power | 4.5 |
| | 25% prime power | 3 |

EXHAUST SYSTEM

| | | |
|--|-----------|--|
| Maximum Back Pressure (kPa) | 10 | |
| Exhaust Gas Temperature (standby/prime power) (°C) | 420/390 | |
| Exhaust Gas Flow(standby/prime power) (litre/sec.) | 76.5/72.5 | |

AIR INDUCTION SYSTEM

| | | |
|--|---------------------------|-----|
| Maximum Intake Air Restriction (kPa) | | |
| | with Dirty Filter Element | 6.2 |
| | with Clean Filter Element | 3.7 |
| Intake Air Flow (standby/prime power) (litre/sec.) | 34.5 / 34.8 | |

LUBRICATION SYSTEM

| | | |
|--|----------------|-----|
| Oil Pressure (kPa) | | |
| | Idle Speed | 207 |
| | Governed Speed | 345 |
| Maximum Oil Temperature (°C) | 121 | |
| Min. required Lube system capacity-sump plus filters (liter) | 10.9 | |

COOLING SYSTEM

| | | |
|---|-----------|--|
| Coolant Capacity — Engine Only (liter) | 7.2 | |
| Standard Thermostat Modulating Range (°C) | 82-95 | |
| Maxi. Top Tank Temp. for Standby/Prime Power (°C) | 110 / 104 | |

ELECTRICAL SYSTEM

| | | |
|---|----------------------------------|-----|
| Cranking Motor (Heavy Duty, Positive Engagement) (volt) | 12 | 24 |
| Battery Charging System, Negative Ground (ampere) | 63 | 40 |
| Minimum Recommended Battery Capacity | | |
| | Cold Soak @ -18 to 0-C (0°F CCA) | 312 |

CLEANTECH SOLUTIONS SDN BHD

55, JALAN PERINDUSTRIAN 4/KU8,
KAWASAN PERINDUSTRIAN MERU SELATAN,
41050, KLANG, SELANGOR, MALAYSIA
TEL: 603-3396 0976 FAX: 603-3396 0975
EMAIL: sales@cleantechsolutions.com.my

Alternator

| | |
|--------------------------|---|
| Alternator manufacturer | Leroy-somer Electro-technique (Fuzhou) Company Ltd. |
| Alternator brand | Leroy-somer |
| Alternator model | TAL-A42-C |
| Control system | SHUNT |
| A.V.R. | Included |
| Voltage regulation | ±1.0% |
| Insulation system | Class H |
| Protection | IP23 |
| Rated power factor | 0.8 |
| Winding pitch | Two thirds |
| Winding leads | 6 |
| Frequency (Hz) | 50 |
| Voltage (V) | 400 |
| Phase | 3 |
| Output ratings (kVA/kW) | |
| -----Cont.H-40°C | 30/24 |
| -----Standby-27°C | 33/27.4 |
| THF | <2% |
| TIF | <50 |
| Max. overspeed (Rev/Min) | 2250 |
| Bearing | Single |

Control System

Ai Power adopts ComAp AMF9 or Deepsea DSE6120 as the standard controller for single gen-set applications.. AMF25 or DSE7320 for option.



ComAp AMF9



Deepsea DSE6120

Features

- Single-genset controller for stand-by and prime power applications
- 3 phase AMF function
- 3 phase generator protections
 - over/under frequency, over/under voltage, over current
- True RMS voltage measurement
- True RMS current measurement
- Event and performance log
 - Gen-set ext alarm, Engine hours history, ECU Text alarm, Test Run scheduler
- Power Measurements
- User interface
- Inputs and outputs
 - Configurable analogue/digital, binary
- Direct communication with EFI engines
- Engine Protections
 - Oil pressure, Coolant temperature, Fuel level
- Breaker control via fasica buttons
- Fuel Pump control
- Optional Active Calls(SMS alarm/event)
- Miscellaneous features
- Communication interface
 - USB plug-in, Optional RS232, RS485, GSM
- Multiple display languages
- Start on low battery
- Real-time clock
- Zero power mode
- LCD and LED alarm indication
- Configuration Suite PC Software.
- IP65 protection class
- Remote monitoring

Protection function:

- Low oil Pressure
- High water temperature
- High voltage and low voltage
- Over current
- Over speed
- Emergency stop
- Low fuel alarm and shutdown
- Fail to start

CLEANTECH SOLUTIONS SDN BHD

55, JALAN PERINDUSTRIAN 4/KU8,
KAWASAN PERINDUSTRIAN MERU SELATAN,
41050, KLANG, SELANGOR, MALAYSIA
TEL: 603-3396 0976 FAX: 603-3396 0975
EMAIL: sales@cleantechsolutions.com.my

Open and Silent Generator

Ai Power silent generator is widely used in residential area which require quiet environment, its reasonable and elegant design not only reduce the noise to applicable to the environment protection, but also a good view on the road. Our 10kva to 650kva generator adopts normal silent canopy, from 650kva to 1500kva adopts 20ft container canopy, the higher power adopts 40HQ container canopy.



Open Generator Standard Supply

The Open Type Generator Includes:

1. Automatic control panel.
2. 3 phases or single phase brushless alternator.
3. anti-vibration pad.
4. different brand engine.
5. water cooled radiator.
6. battery protection switch.
7. sealed lead acid free maintenance battery.
8. trickle battery charger.
9. 3P Chinese brand Circuit breaker.
10. Exhaust silencer, elbow and flange.



Silent Generator Standard Supply

Silent Generator Standard Supply:

1. AMF automatic control system
2. Fresh air inlet cooling system
3. Emergency stop
4. 3P Chinese brand Circuit Breaker
5. Cable output placement
6. 8hrs strong base fuel tank
7. stainless steel hinges
8. maintenance door



Silent Canopy Features

Silent Canopy Features:

1. more than 2mm thick steel canopy.
2. High quality paint and strict powder paint processing.
3. large-scale impedance combined type silencer.
4. Stainless steel door locks and hinges.
5. High quality fireproof, soundproof and insulation materials.
6. Clear monitoring control panel and outer emergency stop.
7. Lifting ear is mounted in the base frame for easy pull.
8. Fuel and lub oil drainout is all connected to the canopy.
9. Fuel refill opening is on the outer canopy.

